

SECAP® SA 5300vT

FAST AND ACCURATE, HIGH QUALITY ADDRESSING AND IMAGING

Designed for high speed and performance. The Secap® SA 5300vT provides superior print quality with vacuum transport for precise registration of difficult materials. It is configured with a high quality production feeder for reliable feeding. Prints address, attention line, postal barcode, return address, and indicia, plus spot color, all at the same time! Get professional mail results from a desktop system.



PRINTERS



TABBERS



FOLDERS AND INSERTERS



SOFTWARE

TECHNICAL SPECIFICATIONS

Maximum Speed Per Hour:

Up to 30,000/hr. – Super Draft
 Up to 22,000/hr. – Draft
 Up to 15,000/hr. – Letter
 Up to 7,500/hr. – Executive

Print Area:

3" of print using (2) 1-1/2" print banks

Media Size:

Width: 3" to 14"
 Length: 5" to 15.5"
 Thickness: Up to 1/2"

Print Resolution:

150, 200, 300, 600 dpi horizontal;
 600 dpi vertical

Print Modes:

Super Draft, Draft,
 Letter, Executive

Fonts:

Internal: 12 scaleable fonts
 Attributes: Regular, Bold, Italic,
 Invert, Outline, 5 widths
 Unlimited true type fonts
 (downloadable)

Barcode:

USPS®, Planet Code Barcode,
 EAN-13/UPC-A Internal

Interface:

Centronics Parallel

Driver Compatibility:

Windows 95, 98, 2000, NT,
 ME and XP

Printhead/InkJet Cartridge:

Standard High Resolution,
 Versatile Black, Picaso™ ink,
 Fast Dry Formulation, Spot Color:
 Yellow, Blue, Green, Red; Bulk ink
 for high volume applications

Optional Equipment:

Dryer, Conveyor

Physical Characteristics:


Dimensions: 27"W x 24.5"D x 15"H
 Weight: 120 lbs.
 Power: 120 Vac, 60 Hz

Certification:

UL, CSA

(Specifications subject to change
 without notice.)

Picaso, Secap and the Secap design are
 trademarks of Secap. All other trademarks
 are property of the respective owner.

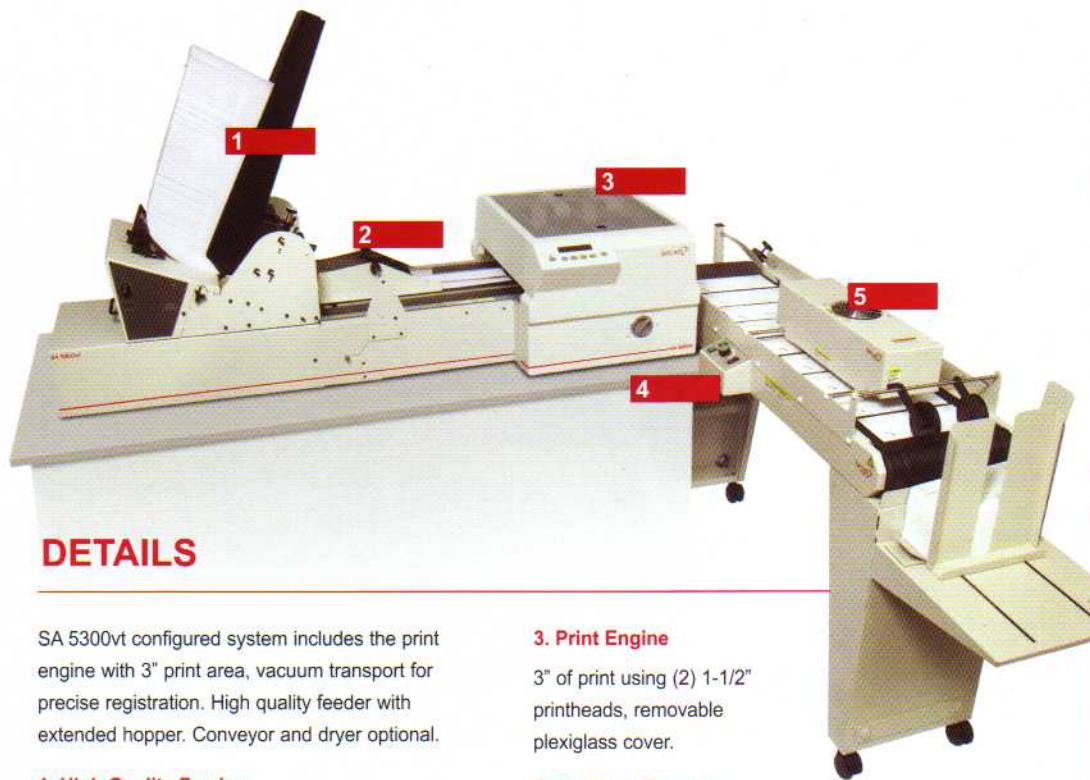

DETAILS

SA 5300vT configured system includes the print engine with 3" print area, vacuum transport for precise registration. High quality feeder with extended hopper. Conveyor and dryer optional.

1. High Quality Feeder

Handles up to 300 pieces of media up to 14" x 15.5" max and up to 1/2" thick including postcards, envelopes, self mailers, flats and booklets.

2. Vacuum Transport

Handles difficult media for precise registration.

3. Print Engine


3" of print using (2) 1-1/2" printheads, removable plexiglass cover.

4. Operator Controls

Easy to read LCD display for simple operation.

5. Optional Conveyor and Dryer

Provides increased drying time and convenient stacking of materials for jobs requiring high speed and increased productivity.

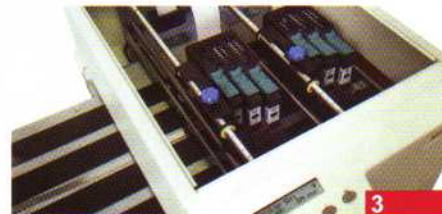

Inkjet Technology by HP

Ask about Secap's complete line of mail stream solutions:



PRINTERS



TABBERS



FOLDERS AND INSERTERS



SOFTWARE

Available from your authorized and certified Secap dealer.



Contact the dealer above or call 800.523.0320 for a Secap dealer near you.

SECAP
 Mail Stream Management and Solutions...

10 Clipper Road
 West Conshohocken, PA
 19428-2721
 800.523.0320
 610.825.6205
 610.825.1397 (fax)
 www.secap.com